

GO! Home Quilt

finished size 22" x 22"

finished block size 9½" x 9½"

Designed by Stacy Michell



GO!® DIES USED

- GO! Home (55379)
- GO! Strip Cutter-2" (55025)
- GO! Strip Cutter-2½" (55014 or 55017)

FABRIC REQUIREMENTS

- Fabric 1—⅓ yard
- Fabric 2—¼ yard or fat quarter or 10" layer cake
- Pieced binding—4, 10" layer cake squares or 4, 2½" jelly roll strips
- Appliqué fabrics—assorted 10" layer cake squares or scraps
- Fusible web—1½ yards
- Backing—¾ yard
- Batting—28" x 28"
- Giant rick rack—100"

CUTTING DIRECTIONS

NOTE: Apply fusible web to the wrong side of fabric, following manufacturer's directions, before cutting for fusible appliqué.

Fabric 1:

- Cut 4—10" squares

Fabric 2:

- Cut 4—2" x 10" rectangles for sashing

Pieced Binding:

- Cut 3—2½" x 10" rectangles from each of four 10" layer cake squares
- OR Cut 1—2½" x 25" rectangle from each jelly roll strip for binding

Appliqué Fabrics:


- Cut 4 sets—house, roof, chimney, circle window and heart accent shape
- Cut 4 sets—sun circle and 6 sunrays
- Cut various tree shapes and tree base shapes
- Cut 1—2" square for sashing center (without fusible web)

Fusible Web:

- Cut 4—¼" x 22" rectangles for rick rack trim

SEWING DIRECTIONS

1. Remove paper backing from appliqué shapes.

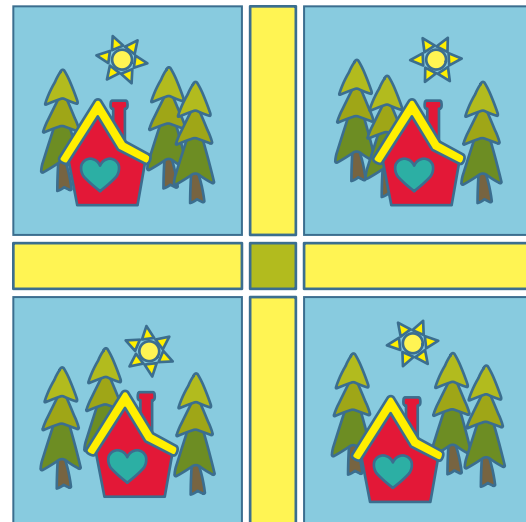

SEWING DIRECTIONS Cont.

2. Arrange house shapes, trees, and sun on Fabric #1, 10" squares following quilt photo. Houses were placed about 2" from bottom edge of background squares.
3. Fuse shapes in place following manufacturer's instructions.
4. Appliqué edges of shapes by hand or machine.
TIP: Appliqué can be done as quilting after the quilt is layered with backing and batting.
5. Pin and sew one Fabric #2, 2" x 10" sashing rectangle between blocks as shown. Press seams toward sashing rectangles. Make 2 block rows.
6. Pin and sew one 2" sashing center square between two sashing rectangles as shown. Press seams toward sashing rectangles.
7. Pin and sew combined sashing/square unit between block rows to complete quilt center.

QUILTING AND FINISHING

1. Layer batting between quilt top and backing.
2. Pin or baste layers together.
3. Model was machine quilted.
4. Pin and sew 2½" x 10" binding rectangles into strips as needed.
5. Apply single fold binding to each edge of quilt with a 1" seam allowance, folding a mock miter at each corner.
6. Hand sew the binding corners and edge to finish.
7. Fuse one ¼" strip of fusible web product to back outside edge of binding. Remove backing paper.
8. Press giant rick rack over fusible web so half the width of the rick rack shows from the front to frame the quilt. Secure rick rack by hand if necessary.
9. Embellish with embroidery, buttons or beads as desired.