


GO! Beep Beep Quilt

finished size 51" x 60"

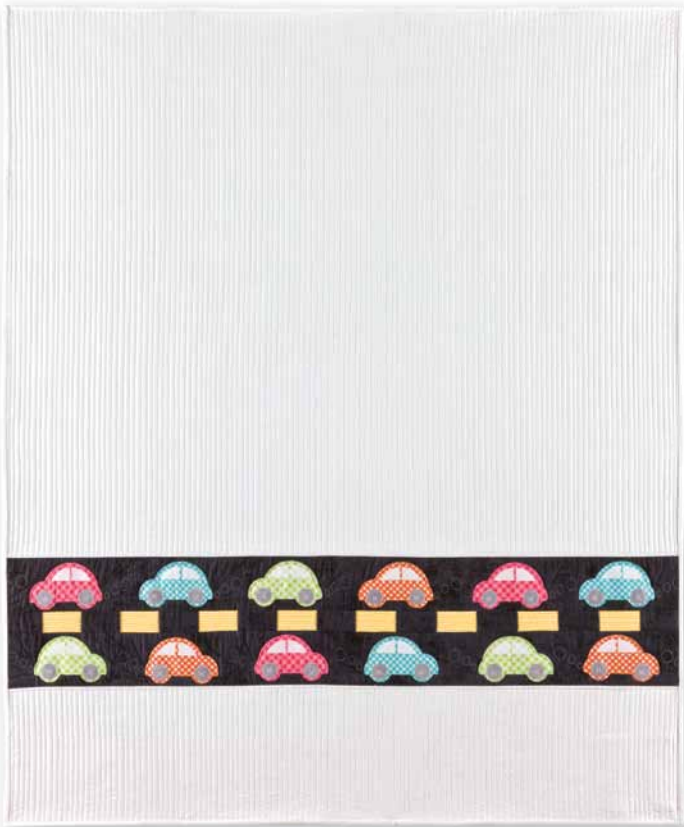

Fabric provided by Riley Blake Designs.

GO!® DIES USED

- GO! Cute Car (55354)
- GO! Rectangle 2" x 3½" (1½" x 3" Finished) (55158)
- GO! Strip Cutter-2½" (2" Finished) (55017 or 55014)
- GO! Strip Cutter-4½" (4" Finished) (55054)

FABRIC REQUIREMENTS

- Fabric 1—3½ yards
- Fabric 2—1½ yards
- Fabric 3—⅛ yard
- Fabric 4 (Various Colors, Red/Blue/Green/Orange)—¼ yard each
- Fabric 5 (Window Fabric)—⅛ yard
- Fabric 6 (Wheel Fabric)—⅛ yard
- Fusible web product—1 yard
- Batting—60" x 70"
- Backing—4 yards

CUTTING DIRECTIONS

NOTE: Apply fusible web product to wrong side of selected fabrics, following manufacturer's instructions, before cutting for fusible appliqué.

Fabric 1:

- Cut 1—40½" x 51½" rectangle
- Cut 1—10½" x 51½" rectangle
- Cut 6—2½" strips (Set aside for binding)

Fabric 2:

- Cut 2—4½" x 51½" strips
- Cut 9—2" x 3½" rectangles

Fabric 3:

- Cut 8—2" x 3½" rectangles

Fabric 4:

- Cut 12—cute cars from various fabrics

Fabric 5:

- Cut 12—sets of windows

Fabric 6:

- Cut 24—wheels

SEWING DIRECTIONS

1. Lay out the nine Fabric #2 rectangles, and eight Fabric #3 rectangles as shown in the picture.
2. Sew rectangles together along the short side. Press seams towards Fabric #2. Strip should measure 2" x 51½"
3. Pin and sew the pieced strip to the long side of one Fabric #2, 4½" x 51½" strip. Press towards Fabric #2.
4. Pin and sew the remaining Fabric #2, 4½" x 51½" strip to the other side of the pieced strip. Press seams towards Fabric #2. The center panel should now measure 10" x 51½".
5. Pin and sew the Fabric #1, 10½" x 51½" rectangle to the long side of the center panel. Press seams towards Fabric #2.
6. Pin and sew the Fabric #1, 40½" x 51½" rectangle to the other side of the center panel. Press seams toward Fabric #2. Quilt top should now measure 51½" x 60½".
7. Iron fusible web onto the backside of your appliqué fabrics.
8. Cut out 12 Cute Cars (reverse six of them to go the opposite direction), 12 sets of windows and 24 wheels.
9. Fuse Cute Cars onto the quilt following the diagram.
10. Using a decorative stitch on your machine, stitch around the edges of the appliqué shapes to secure them to quilt top.

QUILTING AND FINISHING

1. Layer quilt top with batting and backing.
2. Pin or baste layers together.
3. Model was custom machine quilted.
4. Add binding, mitering the corners.